


Slide Seal Replacement

G5.5 EXACT SLIDE JAMB AND WIPE SEAL

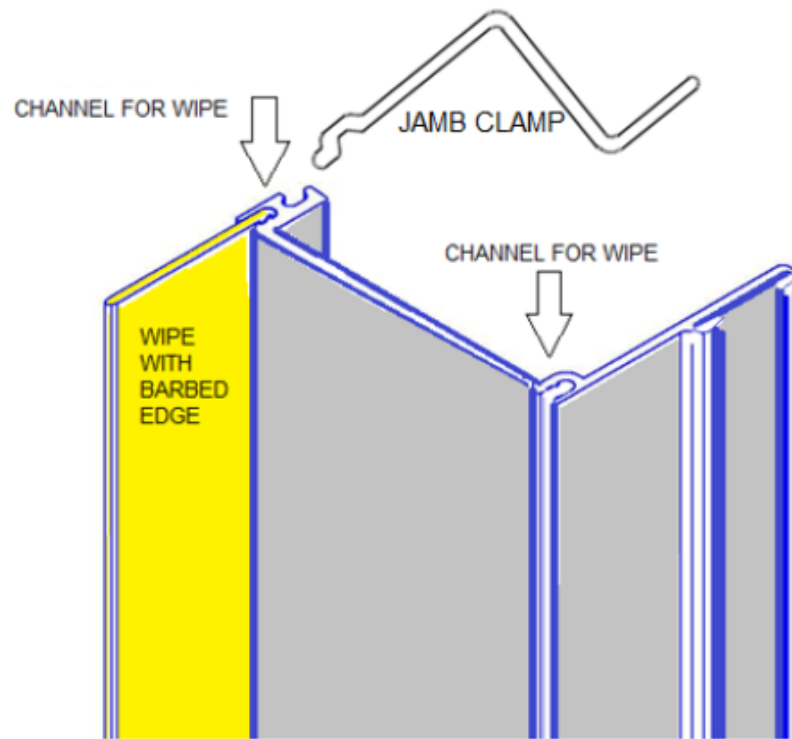

CHANNEL IS PINCHED AT TOP AND BOTTOM TO SECURE THE WIPE SEAL

To remove the wiper seal: Loosen the pinch points at the top and bottom of the channel with a flat head screwdriver, chisel, screen spline, or putty knife. Then pull the seal out of the channel.

To install new seal:

Use a flat head screwdriver, chisel, screen spline, or putty knife to help press the new seal into the channel, so that the barbs catch inside the channel of the jamb.

OR

Spray the barbed edge of the wiper seal and channel on the jamb with soapy water to slide the seal into the track.

NOTE: Remember to pinch the top and bottom of the channel after the new seal is installed.

EXACT-SLIDE
WITH EMFORCE™ TECHNOLOGY