

IMPORTANT: READ THE FOLLOWING INFORMATION BEFORE INSTALLING OR OPERATING!



GEAR RACK

*STORAGE/CARRYING RACK
& OPTIONAL ATTACHMENTS*

INSTALLATION AND OPERATING INSTRUCTIONS



**THIS STORAGE/ CARRYING RACK IS DESIGNED TO BE INSTALLED ON:
NON-AUTOMOTIVE MOTORIZED AND TOWED VEHICLES**

⚠ WARNING!

- **DO NOT** ATTEMPT TO USE THIS RACK FOR PURPOSES OTHER THAN ITS INTENDED USE.
- **MAXIMUM LOAD CAPACITY:** 200 LBS.
- **OPERATOR CAUTION:** ANY MISUSE OF THIS STORAGE RACK MAY CAUSE DAMAGE TO YOUR VEHICLE OR OTHER PROPERTY DAMAGE, SERIOUS INJURY AND/OR DEATH.

TOOLS REQUIRED



9/16" Socket & Ratchet

9/16" Boxed or Open-end Wrench



Torque Wrench

GEAR RACK INSTALLATION

1. Attach mounting brackets (20400196 & 20400197) and angle bracket (20400198) to existing holes in the bumper extensions using supplied 3/8" hardware. Torque to 30 ft/lbs.
2. With two people, attach the GEAR RACK to the mounting brackets by lining up the holes in the rear of the side channels with the holes in the brackets. Affix the GEAR RACK to the brackets with supplied 1/2" clevis pins (864743), hitch pins (864744) and hair pins (862360).
3. The clevis pins (864743) are to be used in the rearmost hole and remain fixed.

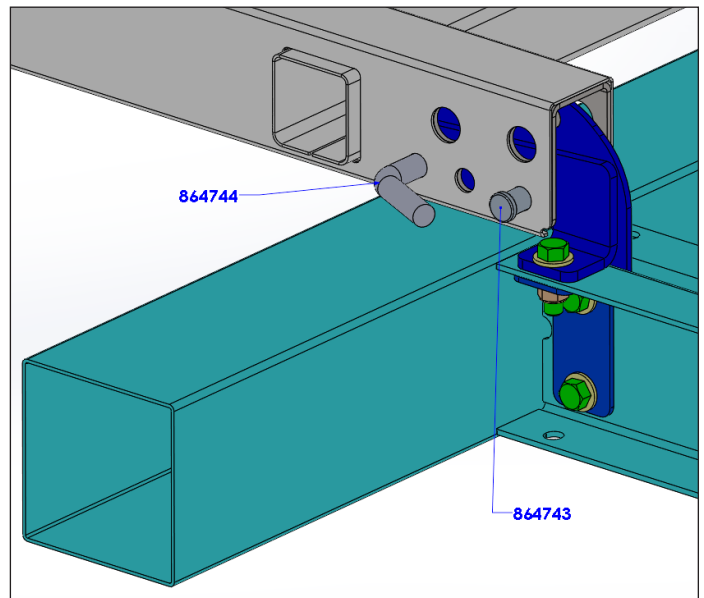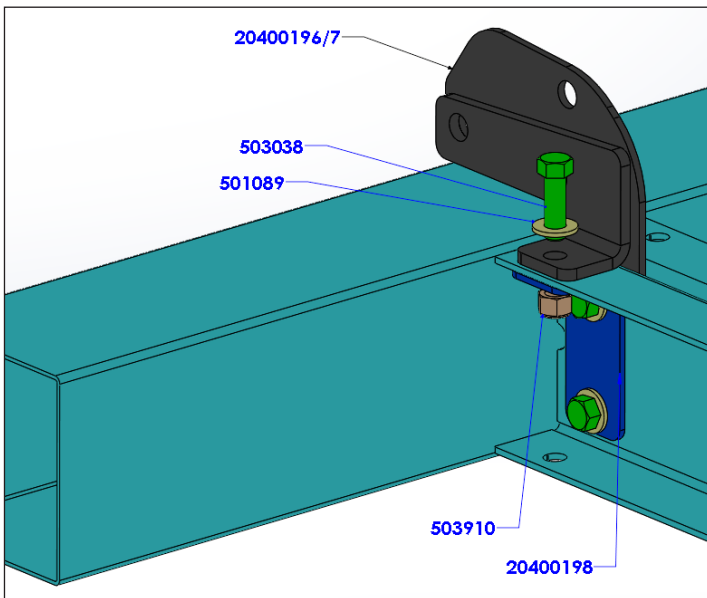

4. The hitch pins (864744) are to be removed and reinserted when moving the GEAR RACK from the *stowed* to *operating* positions with the hair pins (862360) reinserted each time.

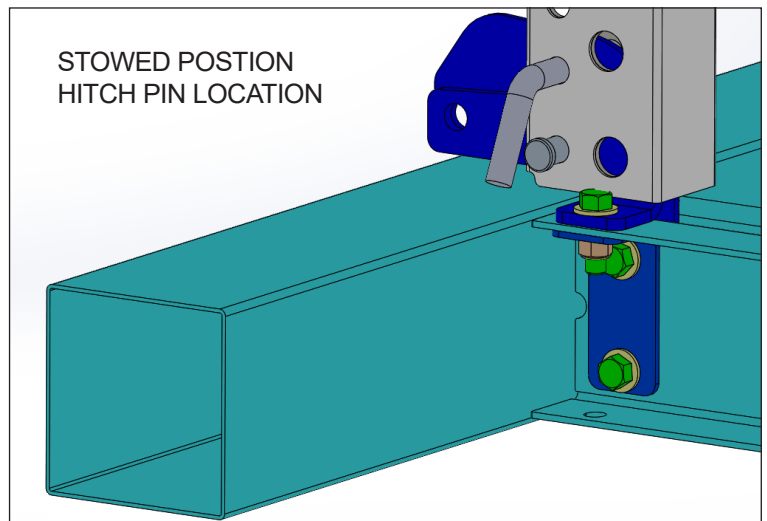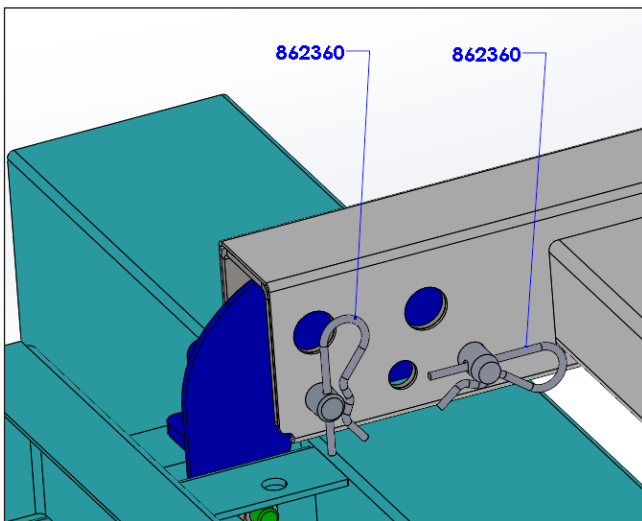

5. It is the responsibility of the end user to ensure any item(s) placed on the GEAR RACK are properly secured, and that they do not exceed the maximum weight capacity identified on the warning label.