
SLIDEOUT MEASUREMENT GUIDE

ALL MEASUREMENTS LISTED BELOW CAN BE MADE WITHOUT REMOVING THE SLIDE ROOM FROM THE ROUGH OPENING




(L) ROUGH OPENING LENGTH:

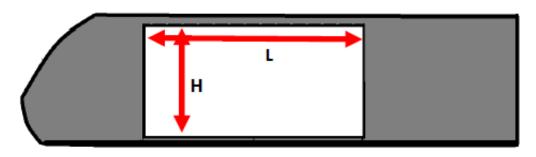


This can be measured above the slide room box. The jamb clamps or wall cap can be removed to expose the inside top corners of the rough opening.

(H) ROUGH OPENING HEIGHT:










TAPERED END WALLS ARE ONLY APPLICABLE ON THROUGH FRAME SLIDES

(RL) ROOM LENGTH

(FINISHED EDGE TO FINISHED EDGE)



(TD) TRAVEL DEPTH

(EXTERIOR STANDOFF BRACKET TO INTERIOR STANDOFF BRACKET):

THIS MEASUREMENT CAN BE TAKEN BY PULLING BACK THE VERTICAL WIPE SEAL AND SLIDING THE MEASURING TAPE BETWEEN THE END WALL OF THE SLIDE BOX AND THE JAMB.